



SECURE-TECH.com

DETENTION ELECTRONIC SYSTEMS

ETECH CONTROLS CORPORATION - MANUFACTURER
4051 ALVIS COURT #3, ROCKLIN, CALIFORNIA, USA 95677
TEL (916) 630-1300 • FAX (916) 630-1100 • FREE (800) 800-2523

**MODEL
TSSF-2**

TAMPERPROOF STAFF STATION, 2 DEVICE RING MOUNT

FEATURES:

- 11GA STAINLESS STEEL FACEPLATE
- TAMPERPROOF SST CALL BUTTON
- TAMPERPROOF SPEAKER DESIGN
- 2.5" (63.5mm) DIAMETER SPEAKER
- STANDARD 2-GANG MOUNTING
- 2 YEAR WARRANTY

FUNCTIONAL DESCRIPTION:

The TSS-2 intercom station is designed for use in the highest security areas. It is suited for both interior and exterior wall mount applications.

FACEPLATE:

The faceplate is 11 gauge brushed stainless steel with radiused corners. Tamperproof SST Torx-2 pin head mounting screws are provided.

CALL BUTTON:


The tamperproof button actuator assembly is stainless steel, non-rotating, with a low profile beveled bezel. It is water and dustproof to IP68 specifications. Rated 5 amps @ 120 VAC, no "pig tails" - screw terminals.

SPEAKER:

The 2.5" (63.5mm) diameter weather resistant, speaker / microphone has a 1.1 oz. (34.2 g) barium ferrite ceramic magnet and is rated 4 watts @ 45 ohm with a frequency response from 200 to 8000 hz. All ferrous material has a corrosion resistant finish. Models with suffix "T" provide an 8 ohm speaker and a 25 volt transformer with 0.5, 1 & 2 watt taps.

MICROPHONE: (SPECIAL VERSION)

Electret, Omni-Directional, Frequency Range 50-15k. Sensitivity -42 dB ±, Signal-to-Noise Ratio >60dB.

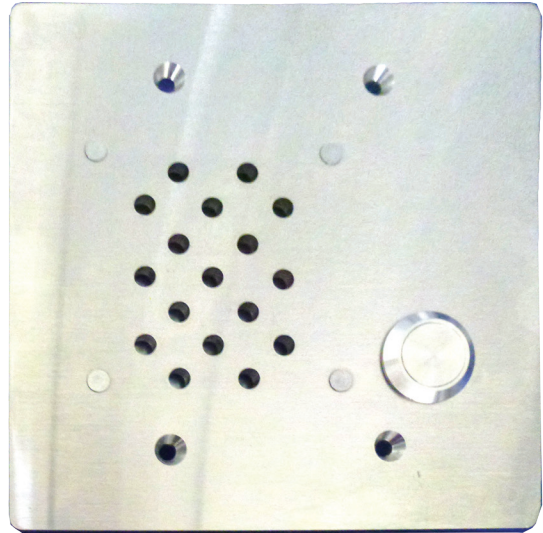

SIZE:

5.00" W x 5.00" L x 1.35" D

127mm W x 127mm L x 34.3mm D

MODELS:

TSSF-2/11	45 ohm speaker
TSSF-2/11M	45 ohm speaker with microphone
TSSF-2/11T	8 ohm speaker with 25 volt transformer
TSSF2-2/11	Two call-in - 45 ohm speaker
TSSF2-2/11T	Two call-in - 8 ohm speaker with 25 volt transformer
TSXF	Without push button

Install on two-device, 1/2" rise, conduit box coverplate, on 4-square deep box or a two-device concrete outlet box 3.5" deep.

ACCESSORY:

TBB-2/14 Weatherproof surface mount backbox, no knockouts, 14 gauge CRS, painted flat black, 5.25" (133.3mm) square x 3.0" (72.4mm) D.

